

PRODUCT DETAILS

PRODUCT CODE	MF77HRX		
WARRANTY	40 months (Private Passenger Use) *		
CHARACTERISTIC	Sealed Maintenance Free Lead Acid Battery		
GROUP SIZE	LN4		
CASE AND LID	Material	:	Polypropylene (PP)
	Handle	:	1 pc Plastic
	Ledges	:	End and Front Ledge (EL & FL)
	Venting System	:	Centralized system with Degassing vents on sides



DIMENSIONS, WEIGHT, AND LAYOUT

OVERALL DIMENSIONS		TERMINAL DATA		METRIC	
LENGTH, mm		TYPE		SAE	
WIDTH, mm		TERMINAL HEIGHT, mm		18.5±1.5	
CASE HEIGHT, mm		BOTTOM DIAMETER, mm		Positive: 19.5+0/-0.3 Negative: 17.9+0/-0.3	
TOTAL HEIGHT, mm		TAPER		1:9	
APPROXIMATE WEIGHT, kg		POLARITY		D (Positive Left)	


CAPACITY SPECIFICATIONS

COLD CRANKING AMPS (CCA)	915 CCA	MAX CHARGING VOLTAGE	14.8 V at 25°C
AMPERE-HOUR AT 20-HOUR CAPACITY	110 Ah	FLOAT CHARGING VOLTAGE	13.5 V – 13.8 V at 25°C
RESERVE CAPACITY (RC)	165 mins	OPERATING TEMPERATURE	-40°C to 80°C** Optimal Temperature: 25°C ± 5°C

*Warranty terms and conditions apply.

**Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.

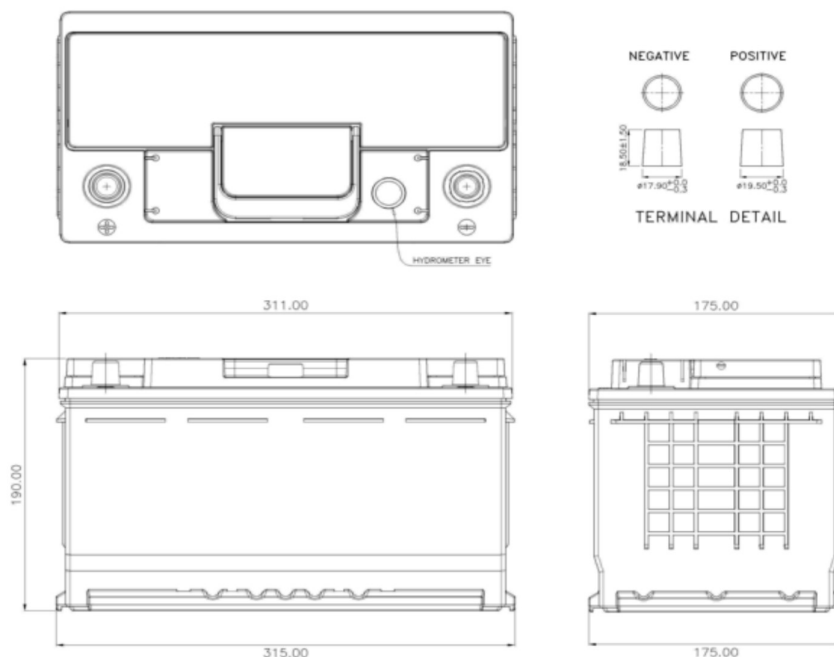

*Warranty terms and conditions apply.

**Based on normal engine bay temperature.

(Note) The company reserves the right to update the information above without prior notice.

Revision No. **23-001**